


# Valve-in-Head Whole House Sediment Water Filter\*

**WITH BUILT IN SHUT-OFF  
VALVE!**



\*Filter cartridge not included

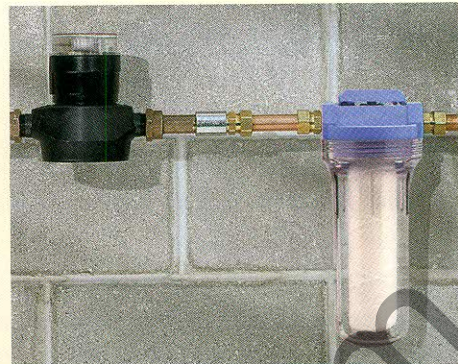

## Culligan HF-360 Valve-in-Head Whole House Sediment Water Filter

Extends life of washing machines,  
water heaters and other household  
appliances

### REDUCES:

- Dirt, sand, and silt
- Rust particles
- Scale particles

### PLUS:

- Shut-off valve in cap for easy cartridge replacement
- Clear housing construction
- 3/4-inch inlet/outlet for installation on 1/2" or 3/4" main cold water line
- Filter housing wrench included

Sediment Filter Cartridge Selection Guide

	CW-MF	SLA	CW-F	P5
Reduces scale and rust particles	•	•	•	•
coarse sand	•	•	•	•
sand/dirt/silt		•	•	•
fine sand/dirt/silt			•	•
extra-fine sand/dirt/silt				•
Filter life**	3 months	4 months	3 months	2 months
Micron rating† (nominal)	30	20	10	5

\*\*Filter cartridge life varies depending on usage and water conditions.  
(1 month = approximately 4000 gallons)

† The smaller the micron rating, the smaller the size particle the cartridge will filter. For comparison purposes, the human hair has a diameter of approximately 70 microns. Particles smaller than 40 microns are not visible to the human eye.



Tested and Certified by NSF International.

**Culligan**  
is Water

*Model HF-360*

# Valve-in-Head Whole House Sediment Water Filter

The Culligan HF-360 Valve-in-Head Whole House Sediment Water Filter eliminates the need for additional shut-off valves on your cold water line. A quick half-turn of the handle on the filter cap shuts off water flow to the filter for hassle-free cartridge replacement. The HF-360 installs on 1/2-inch or 3/4-inch main cold water line to reduce sediment, extending the life of household appliances and fixtures. Dynamically sealing, self-cleaning O-rings prevent leaks and clogging.

## Replacement Sediment Filter Cartridges



### CW-MF

- 30-micron (nominal) filtration
- Coarse sediment filtration - sand, rust particles, and scale particles
- Durable polypropylene fiber cord wound construction
- Filter life of up to 3 months or 12,000 gallons



### S1A

- 20-micron (nominal) filtration
- Sediment filtration - dirt, sand, silt, rust and scale particles
- Pleated cellulose construction for increased surface area and strength
- Filter life of up to 4 months or 16,000 gallons



### CW-F

- 10-micron (nominal) filtration
- Fine sediment filtration - fine dirt, sand, silt, rust particles, and scale particles
- Durable polypropylene fiber cord wound construction
- Filter life of up to 3 months or 12,000 gallons



### P5

- 5-micron (nominal) filtration
- Extra-fine sediment filtration - extra-fine dirt, sand, silt, rust particles, and scale particles
- Resistant to chemicals and corrosion
- Pure spun-polypropylene fiber construction
- Filter life up to 2 months or 8,000 gallons



The P5 is Tested and Certified by NSF International under ANSI/NSF Standard 42 for material requirements only.

Individual Unit			
PART#	WEIGHT (lbs.)	DIMENSIONS (in.) H x W x D	UPC 0-51678
150388	4.33	13.75 x 5.5 x 5.5	50365-2

Case					
PART#	CASE PACK	CASE WT.(lbs.)	CASE cu. ft.	DIMENSIONS (in.) H x W x D	CASE UPC 1-00-51678
150388	6	26	1.63	16.63 x 11.75 x 14.44	50365-9

Replacement Filter Cartridges & Accessories							
MODEL #	PART#	CASE PACK	CASE WT.(lbs.)	CASE cu. ft.	CASE DIMENSIONS (in.) L x W x H	UPC 0-51678	CASE UPC 1-00-51678
CW-MF*	155187-26	12 pr.	10	1.02	16 x 10.75 x 10.25	18772-2	18772-9
S1A*	155001-26	12 pr.	9	1.18	17.25 x 11.5 x 10.25	00172-1	00172-8
CW-F*	155186-26	12 pr.	11	1.02	16 x 10.75 x 10.25	18672-5	18672-2
P5*	155014-26	12 pr.	9.4	1.02	16 x 10.75 x 10.25	01472-1	01472-8
OR-34	151120-27	6	0.11	Env.	10.5 x 7.5	12056-9	12056-6
SW-2	150295-27	6	1.2	0.28	14 x 7 x 5	29571-7	29571-4
BF-34	151195	6	4	0.15	6 x 6 x 7	51176-3	51176-0
UB-1	151190	6	3	0.32	11.75 x 7.25 x 6.5	51179-4	51179-1


\*Cut-case also available. See Bulletin #201080

## Optional Accessories/Replacement Parts:

3/4-Inch I/O Filter Housing O-Ring Model OR-34



3/4-Inch I/O Filter Housing Wrench Model SW-2



3/4-Inch I/O Brass Fittings Kit Model BF-34



Whole House Filter Bracket Model UB-1



**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

**NOTE:** Contaminants or other substances removed or reduced by this water treatment device are not necessarily in your water.

- This device must be maintained according to manufacturer instructions, including replacement of filter cartridges.
- Read all precautions on box and in manual before installing and using this system.

*5-Year Limited Warranty*

**Customer Service:**

**1-800-634-1455**

**M-F 7:30 a.m. – 5:00 p.m. CST**

**Culligan**

502 Indiana Avenue • P.O. Box 1047  
Sheboygan, WI 53082-1047 U.S.A.

FAX: (920) 457-6652

<http://www.culligan.com>

International calls: (920) 451-9322

International e-mail:

[international@plymouthwater.com](mailto:international@plymouthwater.com)

